



No ROHS hazardous material


Original	Modify content description	Drawn	Checked	Effect of change
△				
△				

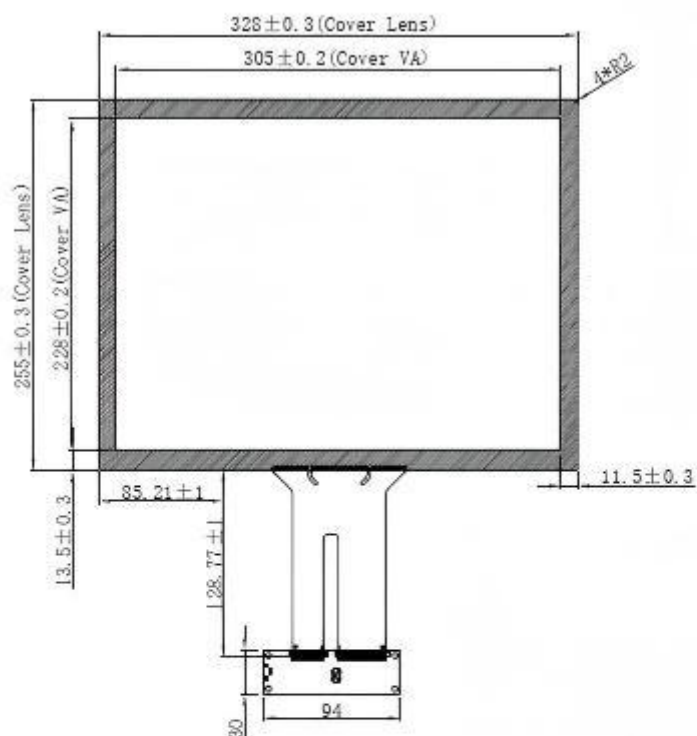

Front view

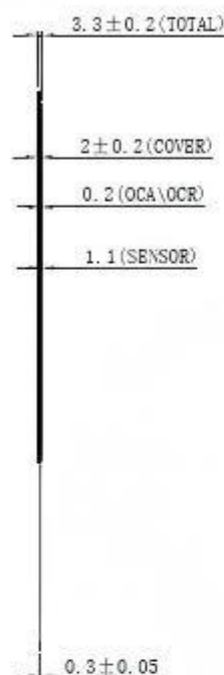


Side view

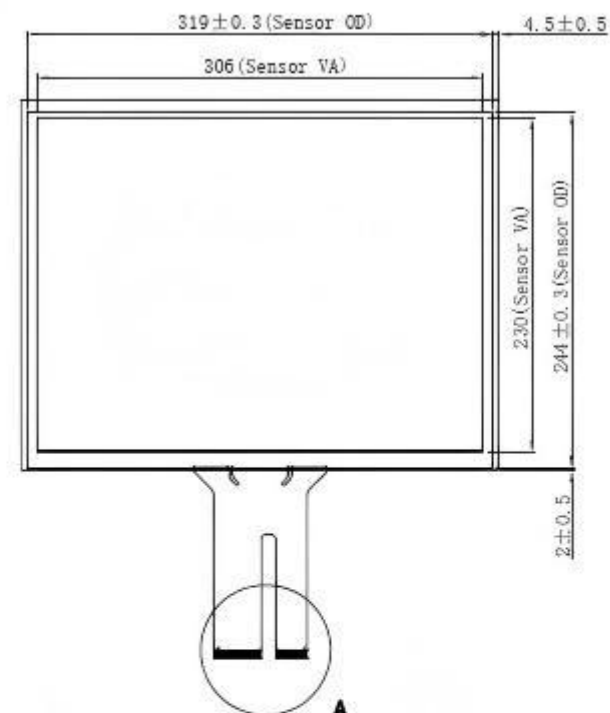

Back view

Technical parameters			
1. Interfaces:	USB	7. Humidity range:	$45 \sim 85\%RH$
2. Structure:	C+C	8. Transmittance:	$\geq 35\%$
3. IC emission:	ILI2302H	9. Surface hardness:	$\geq 6H$
4. Export resolution:	1080P@60FPS	10. Operate:	$-30^{\circ}C \sim +70^{\circ}C$, $\leq 35\%RH$
5. Touch points:	10 points	11. Storage:	$-30^{\circ}C \sim +30^{\circ}C$, $\leq 35\%RH$
6. Power supply:	5V	12. Unmarked dimension tolerance:	± 0.5

USB Connector (J1)	
1	VCC (5V)
2	DN
3	DP
4	GND

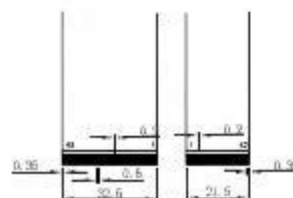

DETAIL "A"
2:1

		杭州宏泉科技有限公司					
		GraHowlet Technology CO.,Ltd					
Model	HX1501703			view direction		Unit	MM
Version	V1.0	Designer	Jan	Date	2017-4-11	Edition	A1
Customer		Approved	HBZ	Date	2017-4-11	Proportion	1:1